

The purpose of this procedure is to initialize the display board in the AccuLoad II with the proper character set. This is only necessary when the display board has been replaced and the display characters are not correct when the unit is powered up (i.e., languages other than English).

1. With the power off, connect a jumper wire between the two test points located on the upper left hand corner (when looking at the board with the AccuLoad cover open) of the display board.

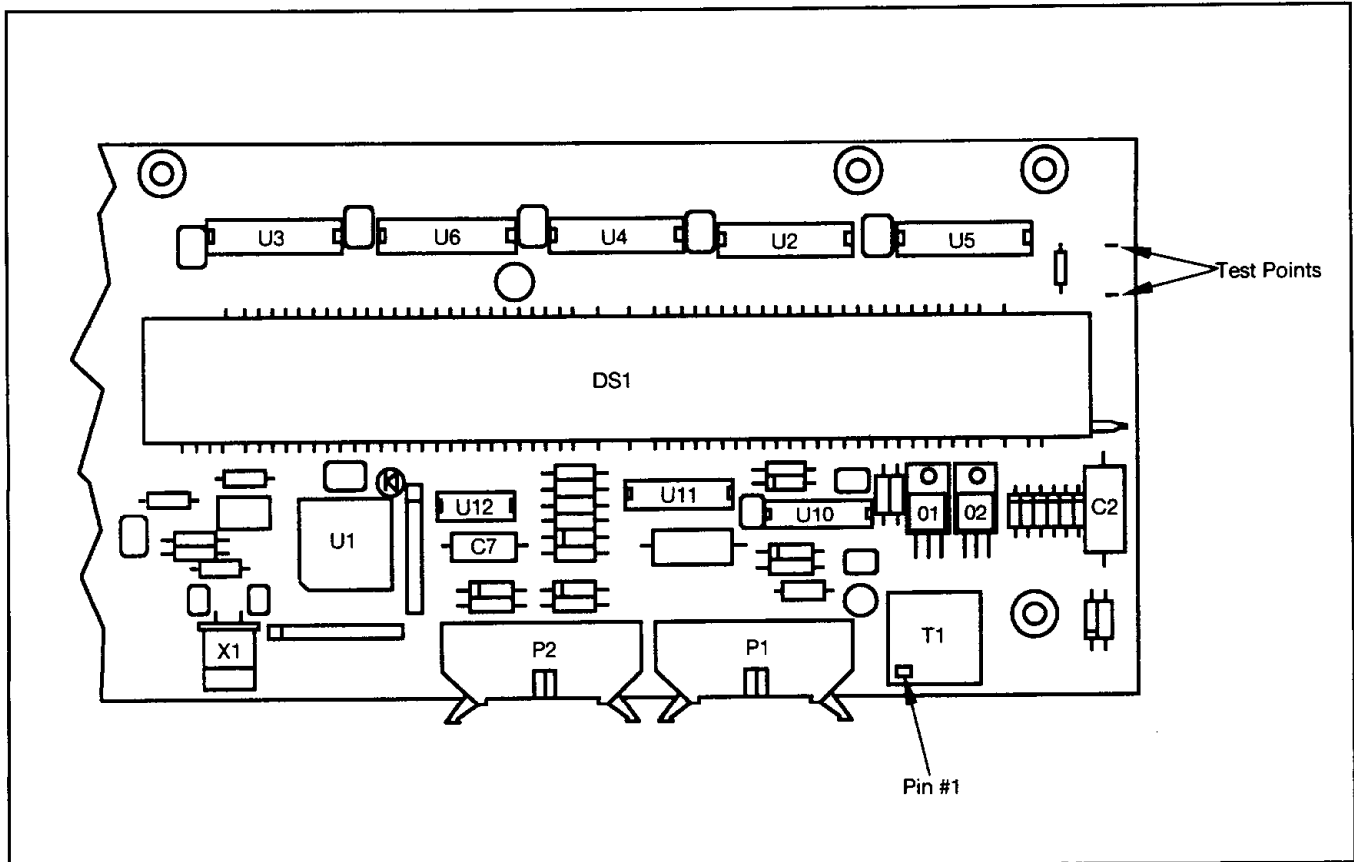


Figure 1 — Display Board

2. Turn the power on. The display will either be blank or have a varying array of dots and characters displayed. If any of the dots are lit, they should go blank within 20 seconds. Approximately one minute after power is turned on, the displays should read:

Left Hand Display

DownLoad Good — Power

Right Hand Display

Down & Remove Jumper

3. Turn power off and remove the jumper from the display board.
4. Turn power on and the AccuLoad should have the correct character set loaded in the display.

Note: If this does not correct the character set or the display does not function properly, refer to display troubleshooting in the service manual.