

The **Smith Meter® Model E4 Meter** is a double-case, straight-through positive displacement meter. It incorporates 4-inch ANSI flanges and should be applied in flow systems that handle rates typical of 3-inch systems, but have 4-inch piping due to pumps and pressure loss considerations. Applications include: blending, batching, dispensing, inventory control, and custody transfer. The relatively high intermittent rating is for use on systems that would require this flow rate infrequently.

Features

- **Superior Accuracy** – The Smith Meter® Rotary Vane meter principle, combined with the meter’s uniquely designed (offset) inlet and outlet nozzles, minimizes pressure drop across the measuring chamber, which reduces flow through meter clearances to maximize accuracy.
- **Low Pressure Drop** – Streamlined flow path provides low pressure drop.
- **Positive and Accurate Registration** – High torque drive calibrator with adjustment in 0.05% increments ensures accurate registration.
- **Long Service Life** – Low friction ball bearings, fixed cam-type timing, and rugged construction give sustained accuracy and long service life.

Options

- **High Viscosity Meter Clearances** – To extend operation at maximum flow rate from 400 mPa•s to 2,000 mPa•s.
- **High Temperature Clearances** – To extend operating temperatures from 150°F to 200°F (65°C to 93°C).
- **All Iron Trim** – For operating temperatures above 200°F (93°C).
- **LPG Trim** – For low lubricity liquids such as LPG.
- **NACE Construction** – Special components available to meet requirements of NACE Standard MR-01-75.



Model E4-S3

Operating Specifications

Maximum Flow Rate

	USGPM	L/min
Continuous Rating – Standard Trim	420	1,600
Intermittent Rating (Extended) ¹ – Standard Trim	600	2,250
Continuous/Intermittent Rating – All Iron or LPG Trim	315	1,200

Minimum Flow Rate – Typical Performance

Linearity ²	Units	Viscosity (mPa•s)					
		0.5	1	5	20	100	400
±0.15%	USGPM	80	50	20	5.0	1.0	0.25
	L/min	303	190	75	19.0	4.0	1.00
±0.25%	USGPM	50	35	15	4.0	0.8	0.20
	L/min	190	132	57	15.0	3.0	0.80
±0.50%	USGPM	40	25	10	2.5	0.5	0.13
	L/min	150	95	38	10.0	2.0	0.50

Repeatability

±0.02%

Viscosity³

Standard: 400 mPa•s (2,000 SSU) maximum.

Optional: 2 Pa•s (10,000 SSU) maximum – specify “High Viscosity Meter Clearances.”

Over 2 Pa•s – specify “High Viscosity Meter Clearances” and derate maximum flow rate in direct proportion to viscosity over 2 Pa•s (e.g., at 4 Pa•s, derate maximum flow rate to 50% of normal continuous rating – 210 USGPM).

¹ Intermittent rating applies to limited service at maximum flow rate on clean, refined products where continuous operation is not required (e.g., truck loading, rail loading, and other batching applications).

² Linearity based on a maximum flow rate of 420 USGPM (1,600 L/min) unless otherwise stated.

³ 1,000 mPa•s = 1,000 cP = 1 Pa•s.

Temperature

Standard Meter Clearances With:

Buna N/EPR/Teflon: -20°F to 150°F (-29°C to 65°C).

Viton: 10°F to 150°F (-12°C to 65°C).

High Temperature Meter Clearances With:

Buna N/EPR/Teflon: -20°F to 200°F (-29°C to 93°C).

Viton: 10°F to 200°F (-12°C to 93°C).

All Iron Trim With:

Buna N: -20°F to 225°F (-29°C to 108°C).

EPR: -20°F to 300°F (-29°C to 149°C).

Teflon: -20°F to 400°F (-29°C to 205°C).

Viton: 10°F to 400°F (-12°C to 205°C).

Other Temperatures: consult factory.

Meter Gearing

Five U.S. Gallons or one Dekalitre per revolution of meter calibrator output shaft.


1 Barrel meter gearing available on E4-S1.

Maximum Working Pressure

Model	Flange	PSI	kPa
S1	150	150	1,034
S3	150	285 ⁴	1,965 ⁴

Flange Class per ANSI B16.5 Raised Flange.

Pressure Drop (ΔP)

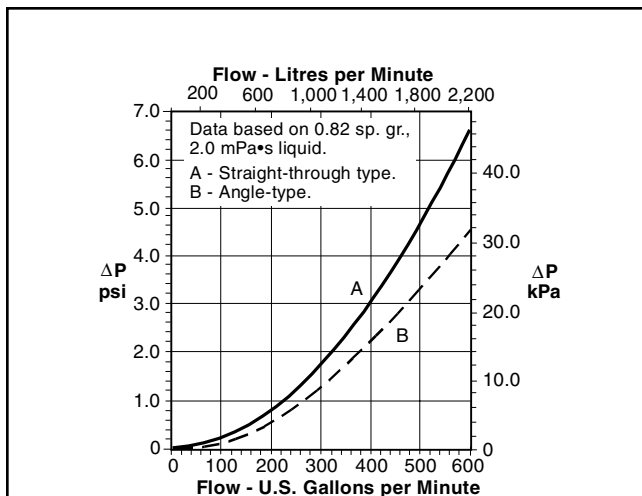

Materials of Construction

Trim	Housing	Internals	Seals
Standard	Steel	Iron, Steel, Stainless Steel, Aluminum	Std. - Buna N Opt'l. - Viton EPR, Teflon
LPG		Add Rulon and Nylon	
All Iron		Delete Aluminum	

Installation

It is recommended that the meter be protected with a suitable mesh strainer.

⁴ Maximum w.p. at 100° F (38° C)

⁵ Specify: minimum/normal/maximum.

⁶ Standard seals supplied unless optional material specified.

⁷ Per revolution of LNC Right Hand Wheel.

Ordering Information

Application	Batching, Loading, Blending, Inventory, Process Control, etc.
Operating Conditions	Liquid - Name and sp. gr., Flow Range ⁵ , Temp. Range ⁵ , Viscosity Range ⁵ , Maximum Working Pressure
Seals	Buna N ⁶ , Viton, EPR or Teflon
Units of Registration	Gallons, Liters, Pounds, Kilograms
Direction	Left-to-right flow (as viewed from above) is standard and will be supplied unless right-to-left flow is specified
Style	Straight-through
Options & Accessories	As required

Accessories

Strainer

4" steel, R.F. flanged, 4 mesh or finer screen.

Mechanical Preset Valves

4" straight-through type, steel, R.F. flanged.

Hydraulic Valves

4" globe-type, steel R.F. flanged (spool piece or smaller orifice plate is required for rate of flow control).

Air Eliminator

4" steel, R.F. flanged, 300 psi maximum working pressure

Counters

200 Series - Accumulative, nine-digit, non-reset type.

600 Series - Five large-digit reset, eight small-digit non-reset.

Printer

Seven-digit accumulative.

Optional six-digit zero start.

Preset Counter

300C Series - Four-digit (five-digit optional) mechanical pushbutton preset with valve linkage. Microswitch package for hydraulic valve, pump control, or other interlock optional.

Pulse Transmitters

Type E - SPDT Mercury-Wetted Switch.

LNC Pulse Transmitter (adapts to 600 Series Counters).

Low Resolution - 1 or 10 pulses⁷.

High Resolution (HR) - 50 or 100 pulses⁷.

UPT - Quad-channel, infrared, security pulse transmitter in an explosion-proof housing (up to 1,000 pulses/rev.).

Flow Rate Indicator

Direct mount mechanical.

Remote electronic.

Accessories (continued)

Remote Registration

Electromechanical counters.
Electronic totalizers.



Automatic Temperature Compensation

Model ATC – Factory-set for a given product.
Model ATG – Field-adjustable for different products.

Dimensions


Inches (mm)

Model E4-S1/S3

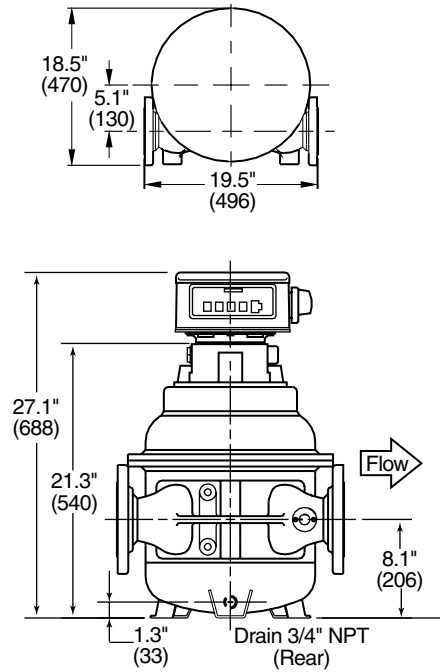

NPS 4.00
Class 150 ANSI
Grooved Raised
Face Flange
per ANSI B16.5

Model	Weight	
	Lb	Kg
E4-S1/S3	280	127



Meter Anchor Bolt Holes
3 - 0.75" (19) Bolt Holes
on a 13" (330) Diameter Bolt Circle.

Note: Dimensions – Inches to the nearest tenth (millimetres to the nearest whole mm), each independently dimensioned from respective engineering drawings.

Revisions included in SS01011 Issue/Rev. 0.7 (8/09):
Model E4-A1 removed.

The specifications contained herein are subject to change without notice and any user of said specifications should verify from the manufacturer that the specifications are currently in effect. Otherwise, the manufacturer assumes no responsibility for the use of specifications which may have been changed and are no longer in effect.

Contact information is subject to change. For the most current contact information, visit our website at www.fmctechnologies.com/measurementsolutions and click on the "Contact Us" link under the "Quick Links" in the right-hand column.

Headquarters:

500 North Sam Houston Parkway West, Suite 100, Houston, TX 77067 USA, Phone: +1 (281) 260 2190, Fax: +1 (281) 260 2191

Gas Measurement Products:

Erie, PA USA +1 (814) 898 5000

Ellerbek, Germany +49 4101 3040

Thetford, England ++44 1842 822900

Kongsberg, Norway +47 (32) 28 67 00

Buenos Aires, Argentina +54 (11) 4312 4736

Integrated Measurement Systems:

Corpus Christi, TX USA +1 (361) 289 3400

Kongsberg, Norway +47 (32) 28 67 00

San Juan, Puerto Rico +1 (787) 772 8100

United Arab Emirates, Dubai +971 (4) 883 0303

Liquid Measurement Products:

Erie, PA USA +1 (814) 898 5000

Los Angeles, CA USA +1 (310) 328 1236

Slough, England +44 (1753) 571515

Ellerbek, Germany +49 4101 3040

Barcelona, Spain +34 (93) 201 0989

Moscow, Russia +7 495 5648705

Melbourne, Australia +61 (3) 9807 2818

Beijing, China +86 (10) 6500 2251

Singapore +65 6861 3011

Chennai, India +91 (44) 450 4400

Visit our website at www.fmctechnologies.com/measurementsolutions