

## Temperature Probes and Wells

Smith Meter's temperature probes and wells are used to interface the temperature input necessary for Smith Meter's electronic presets and flow computers to make temperature-related calculations.

### Features

- 316 Stainless Steel Well
- Platinum Probe
- Explosion-Proof
- UL- and CSA-Approved

### Applications

Applications include pipelines, shipping docks, loading racks, refineries, chemical plants, processing installations, and tank farms.

Applications	Probe/Well Model No.
Customer-installed in system piping. (3/4" NPT well)	TPW-3
Customer-installed in 3 or 4-inch 210 valve or system piping. (1/2" NPT Well)	TPW-4

### Specifications

#### Probes (TP-3, 4)

Sheath Diameter: 1/4".

Number of Wires: Four (TP\_-3, 4).

Material of Construction: High purity platinum wire, fiberglass insulation.


Resistance: At 32°F (0°C) - 100 Ω.

Temperature Coefficient: At 32°F to 212°F (0°C to 100°C) - 0.00385 Ω/Ω/°C.

Temperature Tolerance: At (0°C) - (±0.1°C).

Temperature Range: -50°F to 800°F (-45°C to 425°C).

Connection Head: Listed by FM or UL and CSA for Class I, Div. 1, Groups B, C and D; Enclosure - NEMA Type 4.

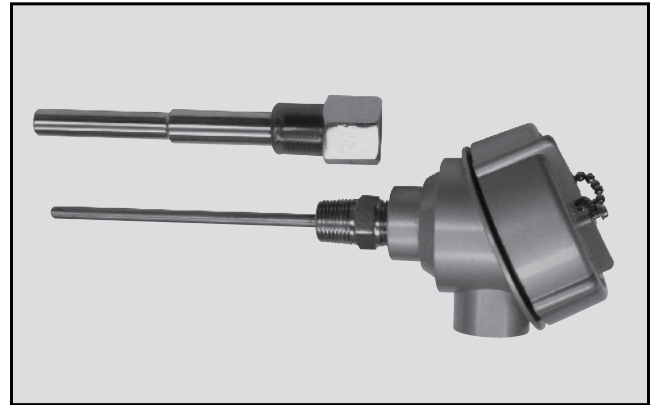

#### Thermowell (TPW-3)

Process Connection Size: 3/4" NPT (Standard).

Bore Size: 0.260.

Insertion Length: See Dimensional Table, Figure 2.

Material of Construction: 316 Stainless Steel.

#### Thermowell (TPW-4)

Process Connection Size: 1/2" NPT.

Bore Size: 0.260.

Insertion Length: See Dimensional Table, Figure 2.


Material of Construction: 316 Stainless Steel.

**Note:** Can be mounted in the body of a PD meter that has a temperature boss or in a port of a 3" or 4" valve.

#### Pipe size and Well Insertion Length Reference

Nominal Pipe Size	Well Insertion Length
2"	1.5
3-4"	2.5
6-8"	4.5
10-12"	7.5

**Dimensions – Inches (mm)**

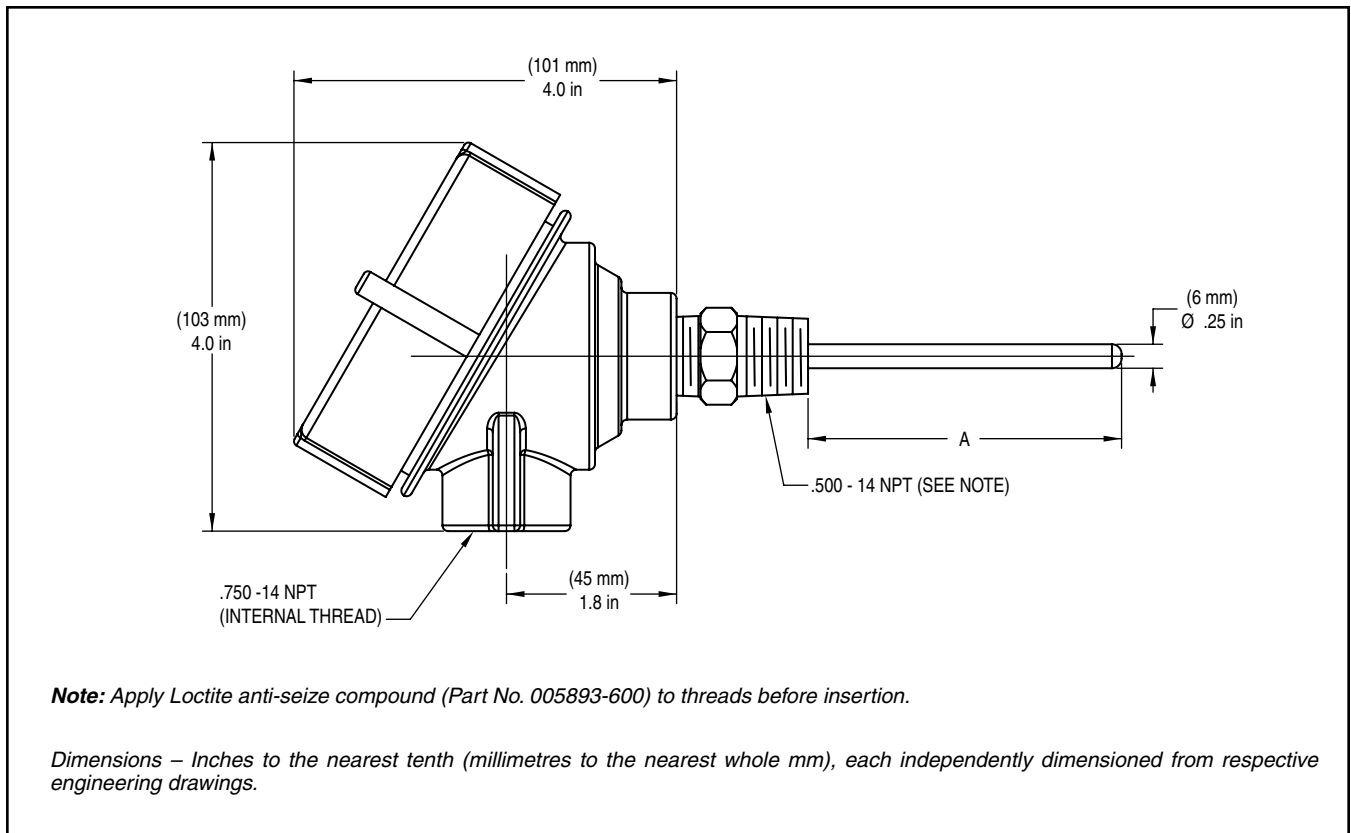

**Figure 1 – Explosion-Proof Temperature Probe**


**Explosion-Proof Temperature Probe**

Model	Dimensions – inches (mm)
	A
TP -__3-1.5	2.2 (57)
TP -__3-2.5	3.2 (83)
TP -__3-4.5	5.2 (133)

Model	Dimensions – inches (mm)
	A
TP -__4-1.5	2.2 (57)
TP -__4-2.5	3.2 (83)
TP -__4-4.5	5.2 (133)
TP -__4-7.5	8.2 (210)


**Note:** Insert model designation for thermowell at the \_\_line. (See Modeling, Page 4.)

**Dimensions – Inches (mm)**

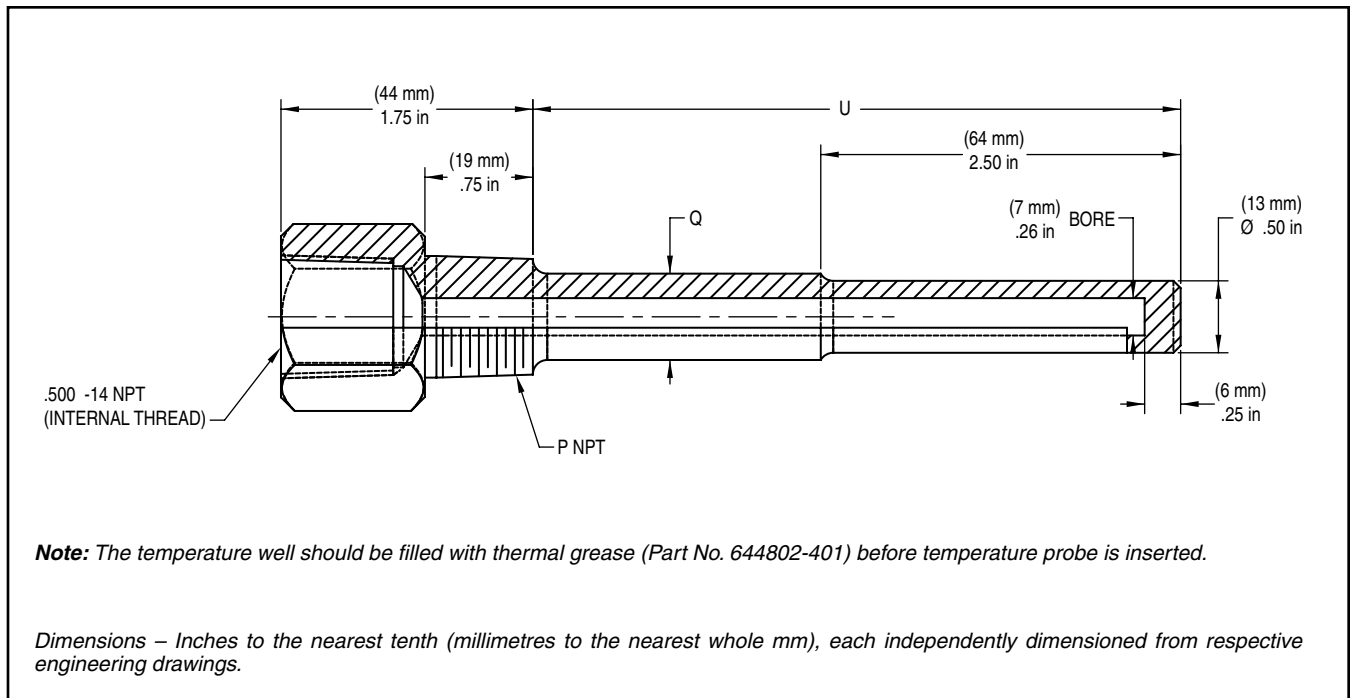

**Figure 2 – Explosion-Proof Temperature Well**

Probe	External Thread	Dimensions – Inches (mm)	Diameter – Inches (mm)
	P	U	Q
<b>Application 3</b>			
TP - W 3-1.5	.750-14 NPT	1.5 (38)	.5 (13)
TP - W 3-2.5	.750-14 NPT	2.5 (95)	.5 (13)
TP - W 3-4.5	.750-14 NPT	4.5 (114)	.8 (19)
<b>Application 4</b>			
TP - W 4-1.5	.500-14 NPT	1.5 (38)	.5 (13)
TP - W 4-2.5	.500-14 NPT	2.5 (95)	.5 (13)
TP - W 4-4.5	.500-14 NPT	4.5 (114)	.6 (16)
TP - W 4-7.5	.500-14 NPT	7.5 (191)	.6 (16)

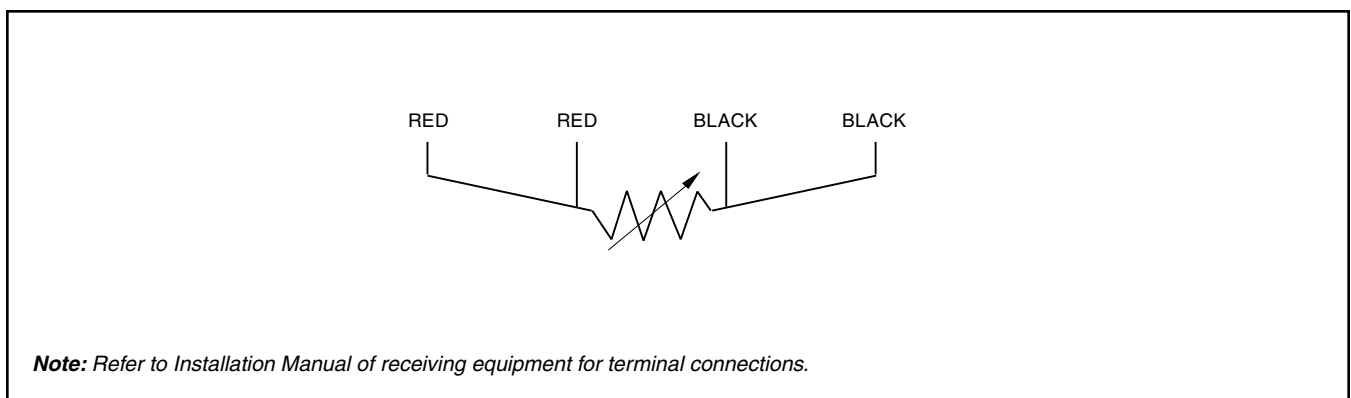

**Figure 3 – Wiring – Four-Wire Probe (TPW-3, 4)**

## Modeling – Temperature Probe and Well (For Direct RTD Input)

---

TP W — 3 — 2.5

### Model Designation

TP – Temperature Probe (4 wire) with  
Explosion Proof Junction Box

### Thermowell

Blank – 1/2" NPT Probe; No Well  
W – With Thermowell

### Application

- 3 – Used with AccuLoad II and III; 1/2" NPT Probe and 3/4" NPT Well
- 4 – Used with AccuLoad II and III; 1/2" NPT Probe and 1/2" NPT Well; Well can be installed in a port on 3" or 4" 210 Valves

### Well Insertion Length

For No Well, use pipe size to determine length  
1.5"  
2.5"  
4.5"  
7.5"

**Note:** For applications other than AccuLoad II and III, reference probe specifications for compatibility to other instrumentation.

Revisions included in SS09035 Issue/Rev. 0.2 (9/09):  
Total Revision.

The specifications contained herein are subject to change without notice and any user of said specifications should verify from the manufacturer that the specifications are currently in effect. Otherwise, the manufacturer assumes no responsibility for the use of specifications which may have been changed and are no longer in effect.

Contact information is subject to change. For the most current contact information, visit our website at [www.fmctechnologies.com/measurementsolutions](http://www.fmctechnologies.com/measurementsolutions) and click on the "Contact Us" link under the "Quick Links" in the right-hand column.

#### Headquarters:

500 North Sam Houston Parkway West, Suite 100, Houston, TX 77067 USA, Phone: +1 (281) 260 2190, Fax: +1 (281) 260 2191

#### Gas Measurement Products:

**Erie, PA USA** +1 (814) 898 5000  
**Ellerbek, Germany** +49 (4101) 3040  
**Thetford, England** +44 (1842) 822900  
**Kongsberg, Norway** +47 (32) 28 67 00  
**Buenos Aires, Argentina** +54 (11) 4312 4736

#### Integrated Measurement Systems:

**Corpus Christi, TX USA** +1 (361) 289 3400  
**Kongsberg, Norway** +47 (32) 28 67 00  
**San Juan, Puerto Rico** +1 (787) 772 8100  
**United Arab Emirates, Dubai** +971 (4) 883 0303

#### Liquid Measurement Products:

**Erie, PA USA** +1 (814) 898 5000  
**Los Angeles, CA USA** +1 (310) 328 1236  
**Slough, England** +44 (1753) 571515  
**Ellerbek, Germany** +49 (4101) 3040  
**Barcelona, Spain** +34 (93) 201 0989  
**Moscow, Russia** +7 (495) 5648705  
**Melbourne, Australia** +61 (3) 9807 2818

**Beijing, China** +86 (10) 6500 2251  
**Singapore** +65 6861 3011  
**Chennai, India** +91 (44) 450 4400

Visit our website at [www.fmctechnologies.com/measurementsolutions](http://www.fmctechnologies.com/measurementsolutions)